

Mod. GN

Water/Foam nozzle

Standard characteristics

Nominal flow rate: From 1000 to 3000 lpm calculated at 7 barg

Body material: Stainless steel and bronze

Actuation: Manual

Jet Type: Fog, Full (Jet)


Horizontal throw and covering angle: See diagram on next page

Base flange made in carbon steel: External diameter Ø160 mm

Coating: Epoxy Primer + Polyurethane red coat RAL3000,
Total DFT >120 µm

Weight: ~5 Kg

Approvals

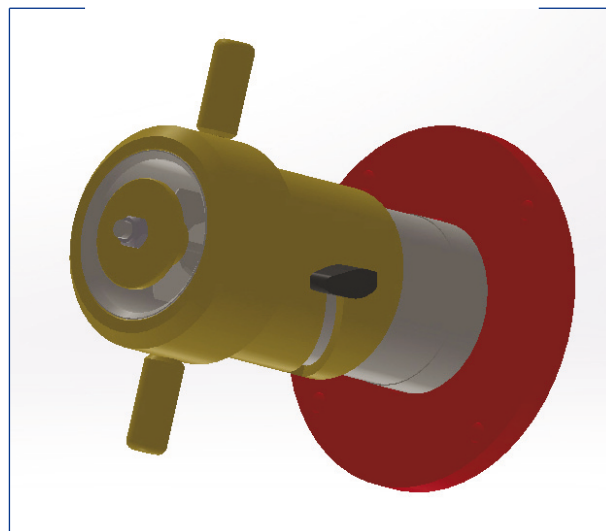

Notes

In case of inquiry and/or order specify the following datas:

> Working pressure

Available on Demand

- > Base Flange: Other Material
- > Other Inlet connection with adapter (NH, Ghost, Storz)
- > Coating: Other painting cycles

Compatible monitors

> MB3, MB4, DOC, MKDB, MKL, MKP, MKW

Key configuration

- > application for electric remote actuation
- > application for oil - hydraulic actuation

www.fasspa.net

Mod. GN

Water/Foam nozzle

Layout & Overall Dimension

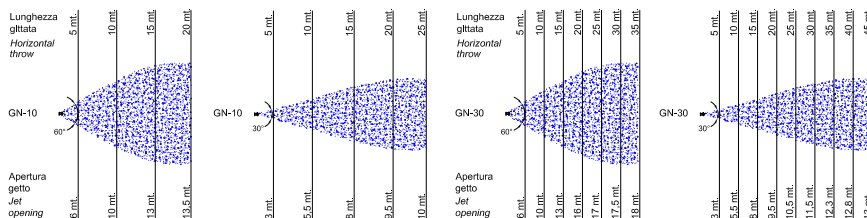
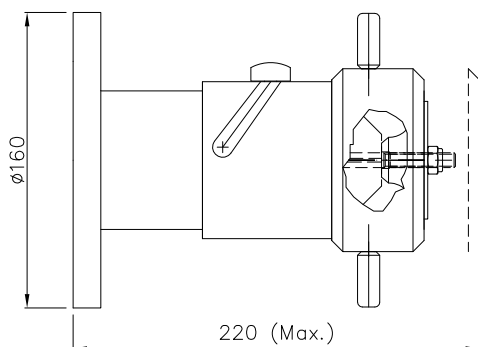


Grafico di gittata - Horizontal throw diagram

Bocchello - Nozzle GN

Gittate a getto nebulizzato - Fog jet horizontal throw

Elevazione bocchello - Nozzle elevation 20° ÷ 30°


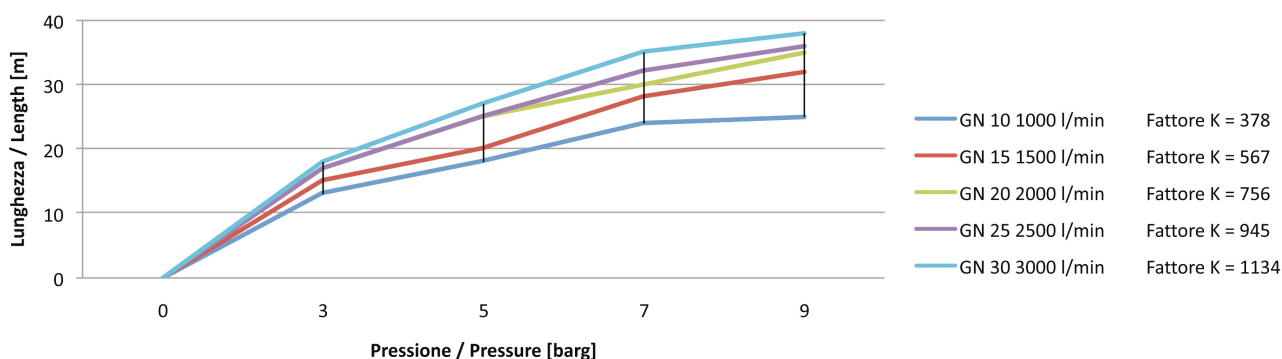


Grafico di gittata - Horizontal throw diagram

Bocchello - Nozzle GN

Gittate a getto pieno - Full jet horizontal throw

Elevazione bocchello - Nozzle elevation 20° ÷ 30°

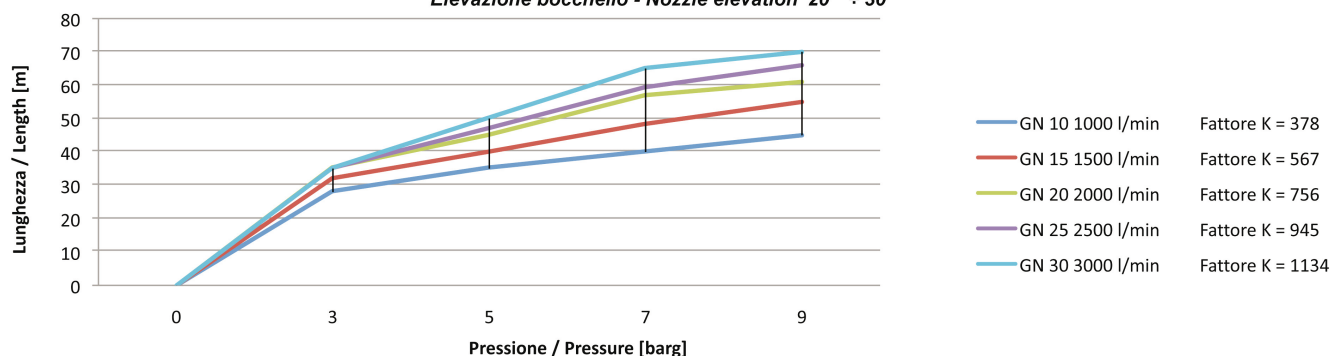

Test in still air, throw length dependent on flow rate and pressure at the nozzle

www.fasspa.net

GN NOZZLE KEY CONFIGURATION

Mod. GN-E - Application for electric remote actuation

Characteristics

Actuation: With electric motor + emergency manual handwheel


Jet Type: Fog, Full (Jet)

Feeding voltage: 240V AC 50/60 Hz. 1 ph.

Weight: ~ 12 Kg



Layout & Overall Dimension - GN Nozzle with electrical actuation

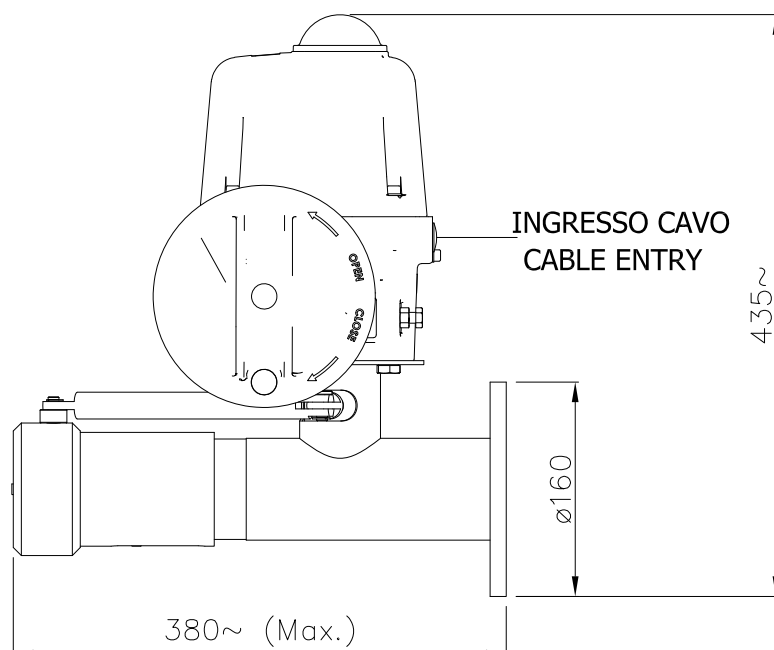

www.fasspa.net

GN NOZZLE KEY CONFIGURATION


Mod. GN-O - Application for oil-hydraulic actuation

Characteristics


Actuation: Oil Hydraulic

Jet Type: Fog, Full (Jet)

Weight: ~ 8 Kg

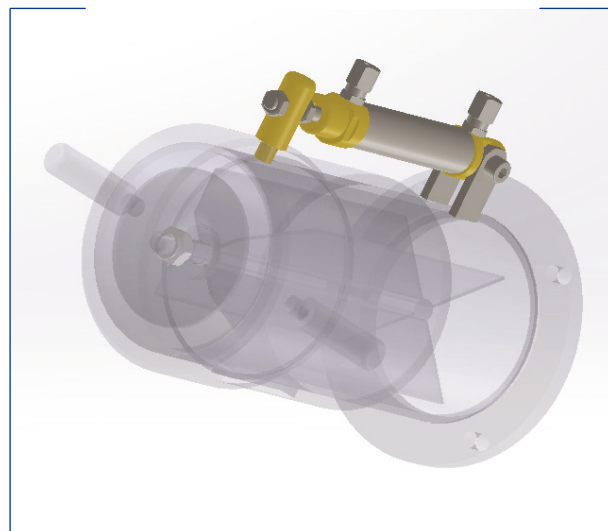

Layout & Overall Dimension - GN Nozzle with oil-hydraulic actuation

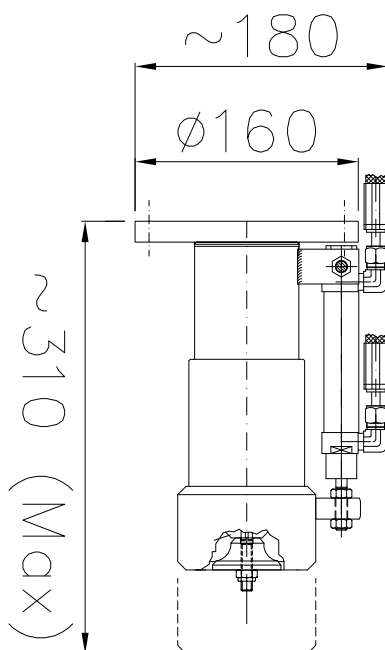

www.fasspa.net